



12"  
A.B.C. OR EXST.  
SUBGRADE  
WHICHEVER  
IS GREATER

ONE SACK SAND-  
CEMENT SLURRY  
BACKFILL.

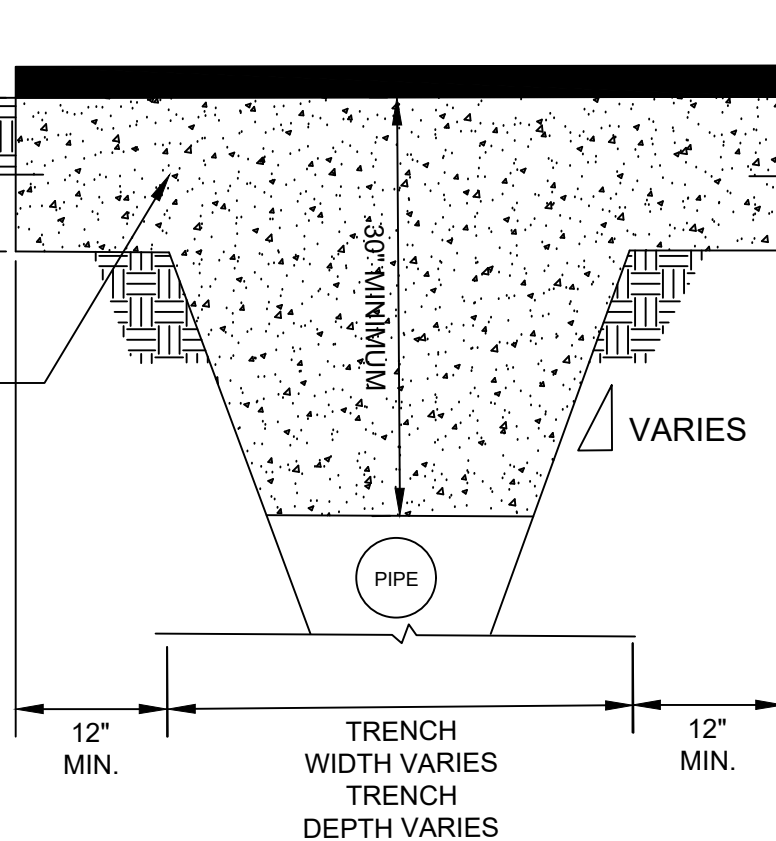

**NOTES:**

1. INITIAL PATCHING MUST BE COMPLETED WITHIN 24 HOURS OF TRENCH BACKFILLING.
2. COLD MIX MAY BE USED FOR TEMPORARY PATCH IF HOT MIX ASPHALT IS NOT AVAILABLE.
3. TEMPORARY PATCH WILL BE REPLACED WITH HOT MIX WITHIN 15 WORKING DAYS OF REPLACEMENT.
4. ALL OTHER MOHAVE COUNTY STANDARDS AND DETAILS SHALL APPLY.
5. SAND-CEMENT SLURRY BACKFILL MAY BE USED IN ALL SECTIONS OF COUNTY RIGHT-OF-WAY.
6. ANY ALTERNATE METHOD OR TIME EXTENSION MUST BE APPROVED BY THE COUNTY ENGINEER.
7. THE PAVEMENT REPLACEMENT FOR TRENCHES WIDER THAN 6 FEET SHALL BE PLACED WITH A SELF-PROPELLED COMPACTING, SPREADING EQUIPMENT IN ACCORDANCE WITH SECTION 336.2.4 OF THE MARICOPA ASSOCIATION OF GOVERNMENTS(MAG) UNIFORM STANDARD SPECIFICATIONS.
8. THE EDGE OF THE EXISTING PAVEMENT SHALL BE SAW CUT TO A STRAIGHT UNIFORM EDGE PRIOR TO INSTALLATION OF THE PAVEMENT REPLACEMENT.
9. ALL PAVEMENT CUTS AND PAVEMENT REPLACEMENT SHALL BE PERPENDICULAR OR PARALLEL TO THE CENTERLINE OF THE PAVEMENT. NO DIAGONAL PAVEMENT CUTS OR PAVEMENT REPLACEMENT WILL BE PERMITTED.
10. THIS DETAIL SHALL BE ADHERED TO WHEN PERMISSION TO OPEN CUT ASPHALT STREETS/ROADWAYS HAS BEEN GRANTED BY MOHAVE COUNTY PUBLIC WORKS.



STANDARD DETAIL  
**MOHAVE COUNTY**

**MINIMUM STANDARDS FOR  
ONE SACK ABC SLURRY BACKFILL**

DETAIL NO  
**200-1**